

MULTI LABEL RESTRICTED BOLTZMANN MACHINE FOR NON-INTRUSIVE LOAD MONITORING

Sagar Verma, Shikha Singh and Angshul Majumdar

Indrapratha Institute of Information Technology, Delhi

ABSTRACT

Increasing population indicates that energy demands need to be managed in the residential sector. Prior studies have reflected that the customers tend to reduce a significant amount of energy consumption if they are provided with appliance-level feedback. This observation has increased the relevance of load monitoring in today's tech-savvy world. Most of the previously proposed solutions claim to perform load monitoring without intrusion, but they are not completely non-intrusive. These methods require historical appliance-level data for training the model for each of the devices. This data is gathered by putting a sensor on each of the appliances present in the home which causes intrusion in the building. Some recent studies have proposed that if we frame Non-Intrusive Load Monitoring (NILM) as a multi-label classification problem, the need for appliance-level data can be avoided. In this paper, we propose Multi-label Restricted Boltzmann Machine (ML-RBM) for NILM and report an experimental evaluation of proposed and state-of-the-art techniques.

Index Terms— Machine learning, Multi-Label Classification, Non-Intrusive Load Monitoring, Smart Grid, Restricted Boltzmann Machine.

1. INTRODUCTION

Increasing population is a direct indication of growth in energy demands in the residential as well as commercial sector [1]. To meet the demands non-renewable resources are used which is the leading cause of global warming [2]. Energy saving and demand-side management is need-of-the-hour.

Load monitoring is one of the ways to collect the energy data required to devise automated energy management systems. It also helps in providing feedback to consumers to understand their consumptions. The feedback enables customers to participate in energy-saving and cost-cutting activities [3].

There are two ways to perform load monitoring. One way is to put sensors on each of the appliances deployed in a building that can sample the energy consumption and store the data. The second way is to use such algorithms that can segregate the appliance-level load from the aggregated units

of consumption. The first one is a non-practical approach. It is not only costly but intrusive too. The second way, known as Non-Intrusive Load Monitoring /Non-Intrusive Appliance Load Monitoring (NIALM), is more practical and scalable than the first one.

Most of the state-of-the-art NILM algorithms, until recently, use historical appliance-level sampled data to learn models of individual appliances used in the building. Once the model for each of the targeted devices is trained, the segregation could be performed just by estimating the device-specific loads from the sampled aggregated load. The requirement of appliances' consumption data makes the training phase intrusive.

In recent studies [4–6], NILM has been framed as a multi-label classification problem. These techniques make use of annotated aggregated load for training the model. The annotation contains information about the ON/OFF state of each of the target devices. The annotation can be performed with the help of the cameras installed on premises. This framework circumvents the need for device-level loads, and thus the training phase does not require multiple sensors in the buildings. This modification enables a large-scale roll-out of NILM from the utilities.

Our work is motivated by advantages of the transformation of NILM as a Multi-label classification task and the success of deep learning as a solution to similar problems. We propose a new approach to multi-label classification based on the Restricted Boltzmann Machine (RBM) [7]. RBMs have never been used for multi-label classification so far. It is a classic example of algorithm adaptation for multi-label classification.

RBMs [8] have been effective in learning high-level features and capturing high-order correlations of the observed variables. A typical RBM has a hidden unit in which nodes are conditionally independent given the visible state. RBMs have good reconstruction accuracy which can be leveraged to generate individual load information in latent space. We propose that generative property of RBMs combined with multi-label supervision can be used to perform NILM via state detection of appliances.

2. LITERATURE REVIEW

2.1. Combinatorial Optimization

Studies in combinatorial optimization (CO) such as [9] are based on the principle that total consumption in a building can be approximated as a sum of device-level loads. So aggregated consumption in a building can be expressed as

$$P_{agg} = \sum_{i=1}^N s_i P_i \quad (1)$$

where P_i is individual device load, P_{agg} is aggregated load, N is the total number of appliances, and s_i is a vector that indicates the state of devices i.e., 0 for 'OFF' state and 1 for 'ON' state.

For load segregation, the motive is to find out the combinations of individual loads whose sum can be approximated as the aggregated load. We can formulate the task of simultaneous detection of ON/OFF state of the devices, \hat{s} , as

$$\hat{s} = \arg \min_s \left| P_{agg} - \sum_{i=1}^N s_i P_i \right| \quad (2)$$

Equation (2) is an NP-hard problem and quickly becomes intractable as the number of appliances scales up.

2.2. Finite State Machines

Apart from the computational complexity, another problem with CO is that it cannot account for the fact that one appliance can run at different power levels, e.g. A.C., fan, washer, etc. However these days most of the appliances (like light, fan, A.C., washer) have marked different states, so it is fair to model the state of the devices as Hidden Markov Models (HMMs). The study [10] models aggregated load as an outcome of the interaction of a finite number of independent HMMs.

Most of the modern appliances such as printers, computers, inverters do not have marked states. They are continuously varying. In such situations, the above assumption fails; this, in turn, leads to poor disaggregation performance.

2.3. Multi-Label Classification

The classification task where one sample may belong to one or more classes is known as multi-label classification (MLC). Hence, in this case, each sample is mapped to a binary vector of 0's and 1's, assigning 0 or 1 to each of the classes.

Since the aggregated load of a building at any instance may be an outcome of several active appliances' consumption, Tabatabaei et al. [4], and Li et al. [5], framed NILM as an MLC problem. [4] compared the performance of two multi-label classifiers viz Multi-Label K-Nearest Neighbours (ML-kNN) and Random k-Label Sets (RakEL) using time-domain and wavelet-domain features of appliances.

Another recent work [6] uses Multi-label Consistent Deep Dictionary Learning for simultaneous detection of active appliances from smart meter data. These methods do not directly segregate appliance-level load but first identify states of appliances and then disaggregated load is obtained by multiplying the average power consumption of device with the number of instances, it was detected to be in an active state. By far these are the most recent and best-known techniques for multi-label classification based disaggregation.

3. PROPOSED APPROACH

Restricted Boltzmann Machines [8] are one type of undirected graphical models that use hidden variables to model high-order and non-linear regularities of the data. A typical RBM is a two-layer bipartite graph with two types of units, the visible units x and hidden units h . An RBM represents probability distributions over the random variables under an energy-based model. The energy model of an RBM is given by $E(x, h) = -x^T W h - b^T x - c^T h$, where W is the weight to be learned. The joint probability distribution over (x, h) is expressed as $P(x, h) = \frac{1}{Z} \exp(-E(x, h))$, where Z is the normalization factor. Learning RBMs is a difficult task due to the tractability involved in computing normalization factor Z . Several learning algorithms have been proposed [11–13] to solve the problem above. Contrastive Divergence (CD) method proposed by Hinton et al. [11] is an efficient method and is widely used to learn RBMs. The generative property of RBM makes it useful for learning latent space representation of data where we don't have information about how data is generated. RBMs have been used for dimensionality reduction [14], collaborative filtering [15], anomaly detection [16] and unsupervised feature learning [17]. The classification RBM has been used for various classification tasks in [7, 18] and label consistent collaborative filtering [19].

3.1. Multi-Label Classification RBM

The joint probability distribution of the proposed multi-label classification RBM model shown in figure 1 is given by,

$$p(y, x, h) \propto e^{-E(y, x, h)} \quad (3)$$

where y is the label unit. We define the new energy function as follows:

$$E(y, x, h) = -h^T W x - a^T x - b^T h - c^T y - h^T U y \quad (4)$$

with parameters $\Theta = (W, a, b, c, U)$. The model is illustrated in figure 1. We find the values of visible and hidden units using (5), (6) and (7) respectively.

$$p(h_j = 1 | x, y) = \sigma(b_j + U_{jl} + \sum_k W_{ji} x_i) \quad (5)$$

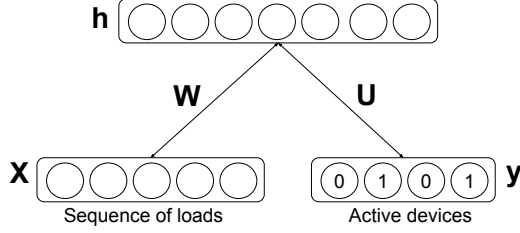


Fig. 1. Proposed architecture for NILM using multi-label classification RBM.

$$p(x_i|h) = \sigma(a_i + \sum_j W_{ji}h_j) \quad (6)$$

$$p(y_l = 1|h) = \frac{\exp(c_l + \sum_j U_{jl}h_j)}{\sum_{l=1}^y \exp(c_l + \sum_j U_{jl}h_j)} \quad (7)$$

where σ is the logistic sigmoid and l is the class label out of C classes. These formulations capture the predictive information about the input vector as well as the target class.

Network parameter Θ is learned using CD [11] algorithm,

$$\begin{aligned} \Delta W_{ij} &= \eta \frac{\delta \log p(x, y)}{\delta W_{ij}} \\ &= \eta (< x_i y_i h >_{data} - < x_i y_i h >_{model}) \end{aligned} \quad (8)$$

where η is the learning rate.

For multi-label classification RBM, the above formulation changes as now we have multi-label information present for each sample. The conditional distribution of y given h becomes:

$$p(y_l = 1|h) = \sigma(c_l + \sum_i U_{li}h_i) \quad (9)$$

This formulation is not tractable since y now has 2^C possible values. Therefore for inference we use mean field (MF) message-passing method for an approximate inference. The MF approach tries to approximate the joint posterior $p(y, h|x)$ by a factorial distribution $q(y, h) = \prod_{l=1}^C \mu_l^{y_l} (1 - \mu_l)^{1-y_l} \prod_{j=1}^n \tau_j^{h_j} (1 - \tau_j)^{1-h_j}$ that minimizes the Kullback-Leibler (KL) divergence with the true posterior. Running the following message passing procedure to convergence

$$\mu_l \leftarrow \sigma(c_l + \sum_j U_{jl}\tau_j) \quad \forall l \in \{1, \dots, C\}, \quad (10)$$

$$\tau_j \leftarrow \sigma(b_j + \sum_l U_{jl}\mu_l + \sum_i W_{ji}x_i) \quad \forall j \in \{1, \dots, n\} \quad (11)$$

we can reach a saddle point of the KL divergence, where μ_l serves as the estimate for $p(y_l = 1|x)$ and τ_j can be used to estimate $p(h_j = 1|x)$.

4. EXPERIMENTAL EVALUATION

We performed the experiments on two standard datasets viz. The Reference Energy Disaggregation Dataset (REDD) [20] and a subset of Dataport dataset [21] (also known as Pecan Street Dataset) available in non-intrusive load monitoring toolkit (NILMTK) format [22].

The REDD dataset is a moderate size publicly available dataset for electricity disaggregation. The dataset consists of power consumption signals from six different houses, where for each house, the whole electricity consumption, as well as electricity consumptions of about twenty different devices are recorded at every second.

The Dataport dataset contains 1-minute circuit level and building level electricity data from 240 houses. It contains per minute readings from 18 different devices: air conditioner, kitchen appliances, electric vehicle, and electric hot tub heater, electric water heating appliance, dishwasher, spin dryer, freezer, furnace, microwave, oven, electric pool heater, refrigerator, sockets, electric stove, waste disposal unit, security alarm and washer dryer.

We compare our results with multi-label classification algorithm proposed so far for NILM viz. ML-kNN, RakEL, and LC-DDL. Both the datasets were split into training, testing and cross-validation set in a ratio of 50:30:20 respectively. Cross-validation set was used to decide the values of hyperparameters. We have munged the data such that each sample contains per hour aggregated consumption and corresponding device labels.

We use PyTorch [23] for the network implementation. In the proposed multi-label classification RBM we use 60 seconds of aggregated load sampled at 1Hz as input to the model. For hidden unit following sizes are tried 32, 64, 128, and 256, we find 128 to be best. The learning rate is set to 0.001 for all our experiments. We use $k = 2$ steps of sampling in CD [11] algorithm to train our model. For inference, we apply sigmoid activation to the output of our model and threshold at 0.5.

Macro F1 and Micro F1 scores are the two metrics which are commonly used to evaluate the performance of Multi-label classifiers. Appliance-level energy error is computed for each device to evaluate disaggregation performance. Macro F1 score is average of individual F1 score of all the classes so it could be biased towards a class with fewer samples. The Micro F1 score indicates the overall performance of the classifier. It is computed by stacking up samples from all the classes. The F1 score of an individual class is given by (12),

$$F1 = \frac{2 \times TP}{2 \times TP + FN + FP} \quad (12)$$

Where TP is the number of true positives, FN is the number of false negatives and FP is the number of false positives.

The appliance-level error also known as Normalized energy error (NEE) is a standard metric which is used in almost every prior study in this area and it is given as (13),

Table 1. Appliance-Level Evaluation on REDD

Device	MLkNN		RAkEL		LC-DDL		MLC-RBM	
	F1-Score	Error	F1-Score	Error	F1-Score	Error	F1-Score	Error
Lighting	0.6476	0.3718	0.6760	0.8213	0.6216	0.2608	0.6947	0.1762
Kitchen	0.5081	0.4304	0.6108	0.6995	0.6411	0.3326	0.7213	0.1273
Refrigerator	0.5292	0.3628	0.6724	0.5132	0.6118	0.2528	0.7186	0.1644
Washer Dryer	0.3903	0.3122	0.5267	0.6990	0.4977	0.3149	0.6983	0.1963

Table 2. Appliance-Level Evaluation on Pecan Street

Device	MLkNN		RAkEL		LC-DDL		MLC-RBM	
	F1-Score	Error	F1-Score	Error	F1-Score	Error	F1-Score	Error
Air Conditioner	0.6391	0.1720	0.6521	0.8565	0.5882	0.1051	0.7023	0.2334
Dishwasher	0.6546	0.1690	0.6728	0.8490	0.4871	0.1501	0.7269	0.1341
Furnace	0.6123	0.1341	0.6231	0.8415	0.5572	0.0794	0.7113	0.2224
Microwave	0.5916	0.0727	0.6819	0.7301	0.5533	0.0795	0.6981	0.1985

Table 3. Performance Evaluation on REDD

Method	Macro F1-Score	Micro F1-Score
MLkNN	0.6086	0.6143
RAkEL	0.6290	0.6294
LC-DDL	0.5222	0.5262
MLC-RBM	0.7082	0.7157

Table 4. Performance Evaluation on Pecan Street

Method	Macro F1-Score	Micro F1-Score
MLkNN	0.6183	0.6194
RAkEL	0.5872	0.6019
LC-DDL	0.5214	0.5332
MLC-RBM	0.7080	0.7123

$$NEE = \frac{\sum_t |P_t^n - \hat{P}_t^n|}{\sum_t P_t^n} \quad (13)$$

where P_t^n is the power consumption of the appliance n at any time instant t .

Table 1 and Table 2 present the F1-Score and correspondingly obtained disaggregation error for each target device in both the datasets. Table 3 and Table 4 contain micro and macro F1-Scores yielded by the state-of-the-art and proposed algorithm on the REDD and Pecan Street dataset respectively. Our proposed model yields the best results regarding classification measures and gives comparable disaggregation accuracy. Although best classification accuracy should reflect the least disaggregation error, here it is not so. This mismatch engenders an ambiguity in results.

We would like to clarify it with an example. Suppose true labels for two hours of aggregate consumption of four devices are 1 0 0 1 and 0 1 1 0 whereas the predicted labels are 0 1 1 0 and 1 0 0 1 respectively. For the given case F1-Score would be zero as all the identified states are wrong. For the same case, disaggregation accuracy would be 100 % as the number of identified active appliances exactly matches the number of true active appliances. This example explains why techniques, such as LC-DDL, gives the best disaggregation ac-

curacy but worst F1-Scores. Therefore in such a framework, the performance of an algorithm should be judged only after looking at both metrics collectively.

5. CONCLUSION

This work proposes a new technique for NILM framed as a multi-label classification problem. The proposed multi-label classification RBM has good reconstruction ability and when combined with multi-label supervision also provides good classification accuracy. This technique does not require any appliance-level data which makes the task completely non-intrusive. We compare the proposed technique with all the prior works where NILM was transformed as a multi-label classification task. We have performed an experimental evaluation of the proposed work on two widely used datasets. Our proposed model yields the best results in term of classification accuracy and comparable results regarding energy disaggregation. Although we have used multi-label RBM for NILM, it is a generic approach and can be used for solving any multi-label classification problem. In the future, we plan to benchmark it against existing algorithms on established multi-label classification datasets.

6. REFERENCES

- [1] United States Energy Information Administration, "United states energy use," 2017.
- [2] D. Archer, *Global warming: understanding the forecast*, John Wiley & Sons, 2012.
- [3] S. Darby et al., "The effectiveness of feedback on energy consumption," 2006, vol. 486.
- [4] S.M. Tabatabaei, S. Dick, and W. Xu, "Toward non-intrusive load monitoring via multi-label classification," 2017, vol. 8, pp. 26–40.
- [5] D. Li and S. Dick, "Whole-house non-intrusive appliance load monitoring via multi-label classification," in *International Joint Conference on Neural Networks*, 2016, pp. 2749–2755.
- [6] V. Singhal, J. Maggu, and A. Majumdar, "Simultaneous detection of multiple appliances from smart-meter measurements via multi-label consistent deep dictionary learning and deep transform learning," 2018.
- [7] H. Larochelle and Y. Bengio, "Classification using discriminative restricted boltzmann machines," in *Proceedings of the 25th International Conference on Machine Learning*, 2008, pp. 536–543.
- [8] P. Smolensky, *Parallel Distributed Processing: Explorations in the Microstructure of Cognition*, 1986.
- [9] G.W. Hart, "Nonintrusive appliance load monitoring," 1992, vol. 80, pp. 1870–1891.
- [10] H. Kim, M. Marwah, M. Arlitt, G. Lyon, and J. Han, "Unsupervised disaggregation of low frequency power measurements," in *Proceedings of the 2011 SIAM International Conference on Data Mining*, pp. 747–758.
- [11] G.E. Hinton, "Training products of experts by minimizing contrastive divergence," August 2002, vol. 14, pp. 1771–1800.
- [12] H. Larochelle, M. Mandel, R. Pascanu, and Y. Bengio, "Learning algorithms for the classification restricted boltzmann machine," March 2012, vol. 13, pp. 643–669.
- [13] B. Marlin, K. Swersky, B. Chen, and N. Freitas, "Inductive principles for restricted boltzmann machine learning," in *Proceedings of the Thirteenth International Conference on Artificial Intelligence and Statistics*, 2010, vol. 9, pp. 509–516.
- [14] G.E. Hinton and R. Salakhutdinov, "Reducing the dimensionality of data with neural networks," 2006, vol. 313, pp. 504–507, American Association for the Advancement of Science.
- [15] R. Salakhutdinov, A. Mnih, and G. Hinton, "Restricted boltzmann machines for collaborative filtering," in *Proceedings of the 24th International Conference on Machine Learning*, 2007, pp. 791–798.
- [16] U. Fiore, F. Palmieri, A. Castiglione, and A.D. Santis, "Network anomaly detection with the restricted boltzmann machine," 2013, vol. 122, pp. 13–23.
- [17] A. Coates, A.Y. Ng, and H. Lee, "An analysis of single-layer networks in unsupervised feature learning," in *Proceedings of the Fourteenth International Conference on Artificial Intelligence and Statistics*, 2011, vol. 15, pp. 215–223.
- [18] X. Li, F. Zhao, and Y. Guo, "Conditional restricted boltzmann machines for multi-label learning with incomplete labels," in *AISTATS*, 2015.
- [19] S. Verma, P. Patel, and A. Majumdar, "Collaborative filtering with label consistent restricted boltzmann machine," in *Ninth International Conference on Advances in Pattern Recognition*, Dec. 2017.
- [20] J.Z. Kolter and M.J. Johnson, "Redd: A public data set for energy disaggregation research," in *Workshop on Data Mining Applications in Sustainability (SIGKDD)*, 2011, vol. 25, pp. 59–62.
- [21] Dataport, "Pecan street dataset," 2014.
- [22] N. Batra, J. Kelly, O. Parson, H. Dutta, W. Knottenbelt, A. Rogers, A. Singh, and M. Srivastava, "Nilmk: an open source toolkit for non-intrusive load monitoring," in *Proceedings of the 5th international conference on Future energy systems*, 2014, pp. 265–276.
- [23] A. Paszke, S. Gross, S. Chintala, G. Chanan, E. Yang, Z. DeVito, Z. Lin, A. Desmaison, L. Antiga, and A. Lerer, "Automatic differentiation in pytorch," 2017.